


3D View  
Filename: South Jordan Medical Date: 02/23/18 Time: 12:16 PM  
Description: Untitled  
Cut: 1585 YD3 Fill: 175 YD3 Export: 1410 YD3



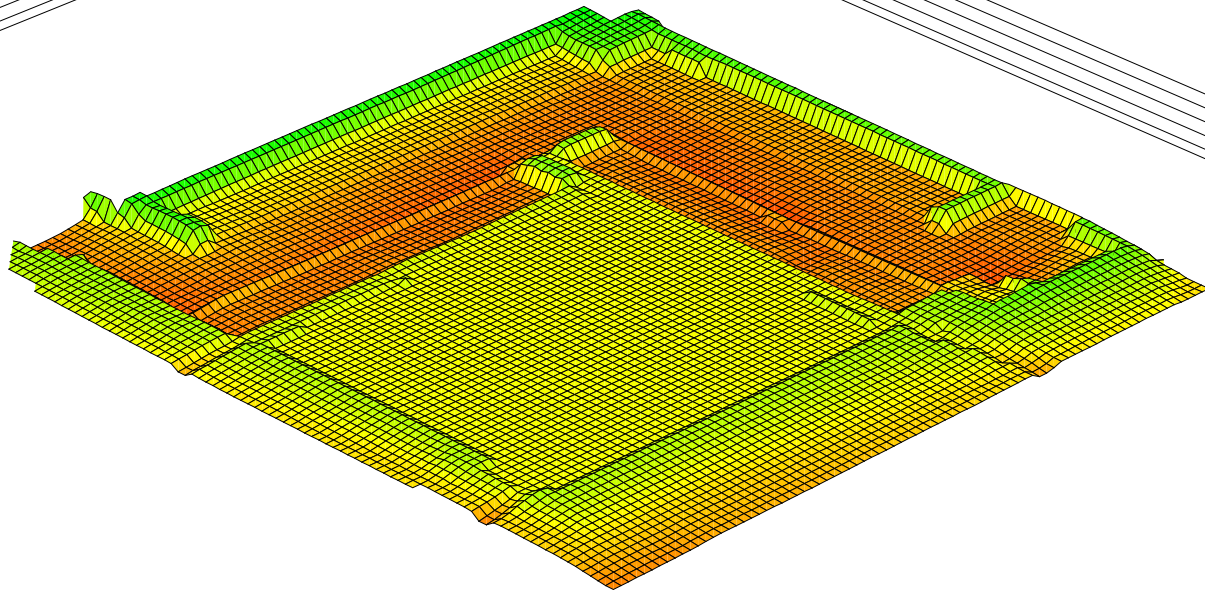

Job Filename: South Jordan Medical

Job Description: Untitled

Scale: 1":20'

Cross-section spacing: 0.50 FT

Soil Expansion: 0%

Soil Compression: 0%

Import Soil Compression: 0%

Cut Area: 34329.3 FT2

Fill Area: 10495.8 FT2

Work Area: 45209.8 FT2

Bank Cut: 1585.4 YD3

Expanded Cut: 1585.4 YD3

Bank Fill: 175.4 YD3

Topsoil Stripped: 0.0 YD3

Topsoil Replaced: 0.0 YD3

Export: 1410.0 YD3

EarthWorks Pro, Dimensions Report      Date: 02/23/18      Time: 12:15 PM  
 Job Filename: South Jordan Medical  
 Job Description: Untitled

Please note that the following information is based solely on the areas' shape and depth and without regard to Perimeters and Excluded Areas.

Area Name	Area, FT2	Perimeter, FT
Building Pad	11334.6	441.8

Subgrade Name	Area, FT2	Perimeter, FT	Volume, YD3
HD Asphalt	7649.9	744.1	566.7
STD Asphalt	304.6	76.6	19.7
STD Asphalt	1982.5	271.6	128.5
STD Asphalt	1911.6	265.5	123.9
STD Asphalt	2138.1	298.3	138.6
STD Asphalt	1870.5	249.6	121.2
Curb & Gutter	813.8	784.3	30.1
Curb & Gutter	1050.5	1062.4	38.9
Sidewalk	2487.3	637.8	61.4
Sidewalk	180.4	80.3	4.5
Curb & Gutter	182.9	178.4	6.8
Dumpster Pad	232.8	64.9	8.6
Building Pad	11334.6	441.8	279.9

Please note that the following information is based solely on the areas' shape and depth and without regard to Perimeters and Excluded Areas.

HD Asphalt - Custom Paving Section			
Asphalt	4.00 in	94.4 YD3	188.89 TON
Crushed Aggregate Base	8.00 in	188.9 YD3	0.00 TON
Structural Subbase	12.00 in	283.3 YD3	0.00 TON

STD Asphalt - Custom Paving Section			
Asphalt	3.00 in	2.8 YD3	5.64 TON
Crushed Aggregate Base	6.00 in	5.6 YD3	0.00 TON
Structural Subbase	12.00 in	11.3 YD3	0.00 TON

STD Asphalt - Custom Paving Section			
Asphalt	3.00 in	18.4 YD3	36.71 TON
Crushed Aggregate Base	6.00 in	36.7 YD3	0.00 TON
Structural Subbase	12.00 in	73.4 YD3	0.00 TON

STD Asphalt - Custom Paving Section			
Asphalt	3.00 in	17.7 YD3	35.40 TON
Crushed Aggregate Base	6.00 in	35.4 YD3	0.00 TON
Structural Subbase	12.00 in	70.8 YD3	0.00 TON

STD Asphalt - Custom Paving Section			
Asphalt	3.00 in	19.8 YD3	39.59 TON
Crushed Aggregate Base	6.00 in	39.6 YD3	0.00 TON
Structural Subbase	12.00 in	79.2 YD3	0.00 TON

STD Asphalt - Custom Paving Section			
Asphalt	3.00 in	17.3 YD3	34.64 TON
Crushed Aggregate Base	6.00 in	34.6 YD3	0.00 TON
Structural Subbase	12.00 in	69.3 YD3	0.00 TON

Curb & Gutter - Custom Concrete Slab			
Gutter Concrete	6.00 in	15.1 YD3	0.00 TON
Gutter Subbase	6.00 in	15.1 YD3	0.00 TON

Curb & Gutter - Custom Concrete Slab			
Gutter Concrete	6.00 in	19.5 YD3	0.00 TON
Gutter Subbase	6.00 in	19.5 YD3	0.00 TON

Sidewalk - Custom Concrete Slab			
Sidewalk Concrete	4.00 in	30.7 YD3	0.00 TON
Sidewalk Subbase	4.00 in	30.7 YD3	0.00 TON

Sidewalk - Custom Concrete Slab			
Sidewalk Concrete	4.00 in	2.2 YD3	0.00 TON
Sidewalk Subbase	4.00 in	2.2 YD3	0.00 TON

Curb & Gutter - Custom Concrete Slab

Gutter Concrete	6.00 in	3.4 YD3	0.00 TON
Gutter Subbase	6.00 in	3.4 YD3	0.00 TON

Dumpster Pad - Custom Concrete Slab

Dumpster Concrete	6.00 in	4.3 YD3	0.00 TON
Dumpster Subbase	6.00 in	4.3 YD3	0.00 TON

Building Pad - None

Building Concrete	4.00 in	139.9 YD3	0.00 TON
Building Subbase	4.00 in	139.9 YD3	0.00 TON

EarthWorks Pro, Materials Summary Report      Date: 02/23/18      Time: 12:15 PM  
Job Filename: South Jordan Medical  
Job Description: Untitled

Please note that the following information is based solely on the areas' shape and depth and without regard to Perimeters and Excluded Areas.

Asphalt	170.4 YD3	340.87 TON
Crushed Aggregate Base	340.9 YD3	0.00 TON
Structural Subbase	587.3 YD3	0.00 TON
Gutter Concrete	37.9 YD3	0.00 TON
Gutter Subbase	37.9 YD3	0.00 TON
Sidewalk Concrete	32.9 YD3	0.00 TON
Sidewalk Subbase	32.9 YD3	0.00 TON
Dumpster Concrete	4.3 YD3	0.00 TON
Dumpster Subbase	4.3 YD3	0.00 TON
Building Concrete	139.9 YD3	0.00 TON
Building Subbase	139.9 YD3	0.00 TON